



T2 Miniature

- Axial Base
- 80 CRI
- 3000K, 3500K or 4100K
- 10,000 Hours

Item	Watts	Nom Length	Lumens	Pkg
FM6	6	8.6"	330	20
FM8	8	12.6"	540	20
FM11	11	16.6"	750	20
FM13	13	20.6"	960	20



T5 Preheat

- Cool White, Warm White or Daylight
- Mini-Bipin Base
- 5,000 Hours

Item	Watts	Nom Length	Lumens	Pkg
F4T5	4	6"	135	25
F6T5	6	9"	295	25
F8T5	8	12"	320	25
F13T5	13	21"	850	25



T5 High Efficiency

- Instant-Start Operation for use with Electronic Ballasts
- Mini-Bipin Base
- 82 CRI
- 3000K, 3500K, 4100K, 5000K or 6500K
- 20,000 Hours

Item	Watts	Nom Length	Lumens	Pkg
F14T5	14	2'	1350	40
F21T5	21	3'	2100	40
F28T5	28	4'	2900	40
F35T5	35	5'	3650	40
F24T5/HO	24	2'	1880	40
F39T5/HO	39	3'	3290	40
F54T5/HO	54	4'	4700	40
F80T5/HO	80	5'	6580	40



T5 Circline - Instant-Start

- Instant-Start Operation for use with Electronic Ballasts
- 2GX13 Base
- 82 CRI
- 3000K, 3500K or 4100K
- 12,000 Hours

Item	Watts	Diameter	Lumens	Pkg
FC22T5	22	9"	1800	10
FC40T5	40	12"	3200	10
FC55T5	55	12"	4000	10



T6 Slimline Instant-Start

- Instant-Start Operation
- Single-Pin Base (Fa8)
- Cool White or Warm White
- 7,500 Hours

Item	Watts	Nom Length	Lumens	Pkg
F42T6	25	42"	1840	12
F64T6	38	64"	2920	12



T8 Slimline Instant-Start

- Instant-Start Operation
- Single-Pin Base (Fa8)
- Cool White, Warm White or Daylight
- 7,500 Hours

Item	Watts	Nom Length	Lumens	Pkg
F72T8	35	72"	3000	24
F96T8	51	96"	4000	24



T8 Polylux

- Medium-BiPin (G13) Base
- 3500K or 4000K
- 85 CRI

Item	Watts	Nom Length	Lumens	Pkg
F70T8	70	72"	6400	25

T8 Tri-Phosphor Instant-Start


- Instant-Start Operation for use with Electronic Ballasts
- "ECO" TCLP-Compliant
- 3000K, 3500K, 4100K, 5000K or 6500K
- 20,000 Hours Standard; 24,000 Hours "XL"

Item	Watts	Base	Nom Length	Lumens	Pkg
F17T8/75CRI	17	MED BIPIN	2'	1300	30
F17T8/85CRI	17	MED BIPIN	2'	1360	30
F17T8/85CRI/XL	17	MED BIPIN	2'	1340	30
F25T8/75CRI	25	MED BIPIN	3'	1940	30
F25T8/85CRI	25	MED BIPIN	3'	2130	30
F25T8/85CRI/XL	25	MED BIPIN	3'	2170	30
F28T8/85CRI/XL	28	MED BIPIN	4'	2700	30
F30T8/85CRI/XL	30	MED BIPIN	4'	2850	30
F32T8/75CRI	32	MED BIPIN	4'	2775	30
F32T8/85CRI	32	MED BIPIN	4'	2950	30
F32T8/85CRI/XL	32	MED BIPIN	4'	3000	30
F40T8/75CRI	40	MED BIPIN	5'	3400	30
F40T8/85CRI	40	MED BIPIN	5'	3600	30
F40T8/85CRI/XL	40	MED BIPIN	5'	3700	30
<hr/>					
F96T8/75CRI	59	SINLGE PIN	8'	5610	24
F96T8/85CRI	59	SINLGE PIN	8'	5850	24
F96T8/85CRI/XL	59	SINLGE PIN	8'	6110	24
<hr/>					
F48T8/85CRI/HO	44	RDC	4'	3560	24
F60T8/85CRI/HO	55	RDC	5'	4870	24
F72T8/85CRI/HO	65	RDC	6'	5255	24
F96T8/75CRI/HO	86	RDC	8'	7800	24
F96T8/85CRI/HO	86	RDC	8'	8200	24

**GIVE
US A
CALL**

**BECOME A CUSTOMER
BECOME A FRIEND**

New York Office **1.800.666.BULB**
California Office **1.888.551.BULB**
Florida Office **1.800.338.BULB**

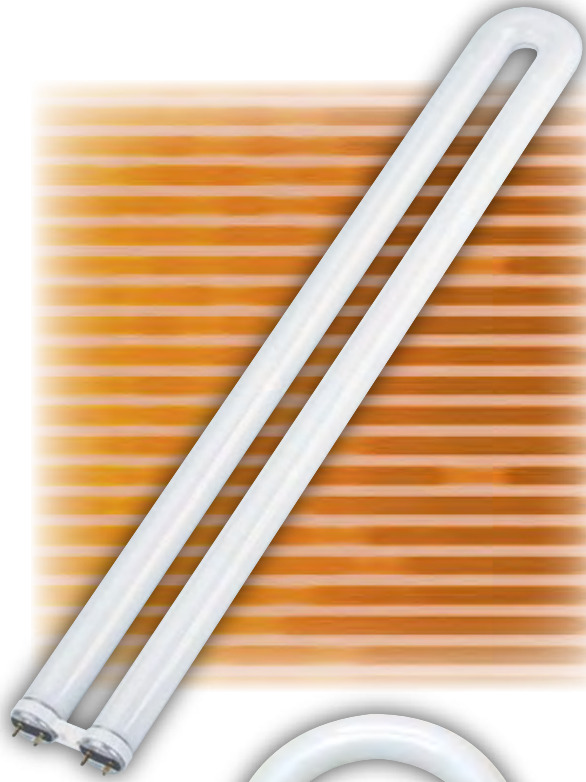

T8 U-Shape

- 1-5/8" Leg Spacing
- Instant Start Operation for use with Electronic Ballasts
- 3000K, 3500K or 4100K
- 85 CRI
- 20,000 Hours Standard; 24,000 Hours "XL"

Item	Watts	Nom Length	Lumens	Pkg
FB16T8	16	10.5"	1100	15
FB24T8	24	16.5"	1910	15
FB31T8	31	22.5"	2700	15
FB31T8/XL	31	22.5"	2775	15



- 6" Leg Spacing
- Instant Start Operation for use with Electronic Ballasts
- 3000K, 3500K, 4100K, 5000K or 6500K
- 20,000 Hours Standard; 24,000 Hours "XL"
- Nominal Length 22.6"

Item	Watts	Lumens	Pkg
FB30T8/85CRI/XL	30	2800	15
FB32T8/75CRI	32	2700	15
FB32T8/85CRI	32	2800	15
FB32T8/85CRI/XL	32	2900	15



T9 Circline - Preheat

- Cool White, Warm White or Daylight
- 4-Pin Base
- 12,000 Hours

Item	Watts	Diameter	Lumens	Pkg
FC6T9	20	6"	760	12
FC8T9	22	8"	1080	12
FC12T9	32	12"	1910	12
FC16T9	40	16"	2775	12



T10 High Performance

- Rapid-Start Operation
- Higher Lumens
- High CRI
- 3000K, 3500, 4100K or 5000K
- Longer Life 24,000 Hours

Item	Watts	Nom Length	Lumens	Pkg
F40T10	40	4'	3575	30



T12 Bipin Preheat

- Preheat Operation requires use of a Starter
- Medium Bipin Base
- Cool White, Warm White, Daylight, 3000K, 3500K, 4100K, 5000K or 6500K

Item	Watts	Nom Length	Pkg
F14T12	14	15"	30
F15T12	15	18"	30
F20T12	20	24"	30



T12 Bipin Rapid Start

- Rapid Start operation on Magnetic Ballast
- Medium Bipin Base
- Cool White, Warm White, Daylight, 3000K, 3500K, 4100K, 5000K or 6500K in various CRI

FullFill™

We are well known for the depth and breadth of our inventory. Our promise to you is that we can fill over 99% of the orders we receive from existing inventory.

Item	Watts	Nom Length	Hours	Pkg
F30T12	30	3'	20,000	30
F34T12	34	4'	20,000	30
F40T12	40	4'	20,000	30
F40T12/XL	40	4'	24,000	30



T12 Instant Start Slimline

- Single Pin Base
- Instant Start operation for use with Magnetic Ballasts
- Cool White, Warm White, Daylight, 3000K, 3500K, 4100K, 5000K or 6500K in various CRI

Item	Watts	Nom Length	Hours	Pkg
F24T12	20	24"	7500	30
F36T12	30	36"	7500	30
F42T12	35	42"	7500	30
F48T12/ES	30	48"	9000	30
F48T12	40	48"	9000	30
F60T12	50	60"	12,000	15
F64T12	52	64"	12,000	15
F72T12	55	72"	12,000	15
F84T12	65	84"	12,000	15
F96T12/ES	60	96"	12,000	15
F96T12	75	96"	12,000	15

THE FACES OF TOPAZ



John Pyatt
Director of Operations/
Warehouse Manager

Topaz is a great place to work !!! We have a wonderful work environment, most of us who work here have been here for years... I have been here since 1988 and each year gets better and better.



T12 High Output

- 800 ma
- Rapid Start Operation for use with Magnetic Ballast
- Recessed Double-Contact (RDC) Base
- Cool White, Warm White, Daylight, 3000K, 3500K, 4100K, 5000K or 6500K in various CRI
- Low Temp Start versions available

Item	Watts	Nom Length	Hours	Pkg
F18T12/HO	25	18"	9000	24
F24T12/HO	35	24"	9000	24
F30T12/HO	40	30"	9000	24
F36T12/HO	45	36"	9000	24
F42T12/HO	55	42"	9000	24
F48T12/HO	60	48"	12,000	24
F60T12/HO	75	60"	12,000	15
F64T12/HO	80	64"	12,000	15
F72T12/HO	85	72"	12,000	15
F96T12/HO/ES	95	96"	12,000	15
F96T12/HO/O	110	96"	12,000	15
F96T12/HO	110	96"	12,000	15



T12 Very High Output

- 1500 ma
- Rapid Start Operation for use with Magnetic Ballast
- Recessed Double-Contact (RDC) Base
- Cool White, Warm White, Daylight, 3000K, 3500K, 4100K, 5000K or 6500K in various CRI


Item	Watts	Nom Length	Hours	Pkg
F18T12/VHO	110	48"	10,000	15
F60T12/VHO	110	60"	10,000	15
F72T12/VHO	165	72"	10,000	15
F96T12/VHO/ES	185	96"	10,000	15
F96T12/VHO	215	96"	10,000	15



T12 U3 Shape

- 3" Leg Spacing
- Rapid Start Operation for use with Magnetic Ballasts
- Cool White, Warm White, Daylight, 3000K, 3500K or 4100K in various CRI
- Nominal Length 22.5"

Item	Watts	Hours	Pkg
FB34/U3	34	14,000	12
FB40/U3	40	14,000	12

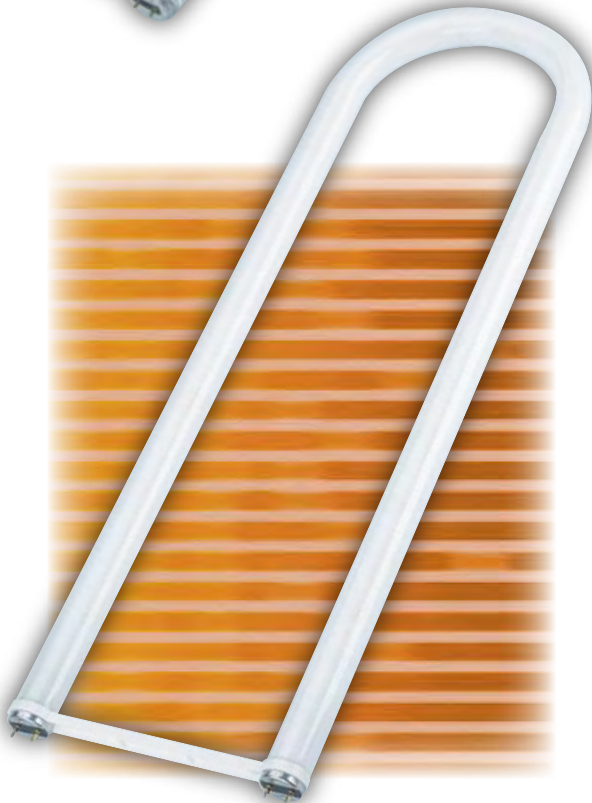

T12 U6 Shape

- 6" Leg Spacing
- Rapid Start Operation for use with Magnetic Ballasts
- Cool White, Warm White, Daylight, Lite White, 3000K, 3500K, 4100K, 5000K or 6500K in various CRI
- Nominal Length 22.5"

Item	Watts	Hours	Pkg
FB34/U6	34	14,000	12
FB40/U6	40	14,000	12

**JOKE
OF THE DAY!**

Not surprisingly, we enjoy sharing a good joke with our customers. For the Topaz "Light Bulb Joke of the Day" just visit our website at www.topaz-usa.com

If you think or hear of a good one, send it to us through our website. If it's chosen to appear in the web site, we'll include your name with the joke and give you a great reward!



Appliance

- Preheat Operation requires Starter
- Cool White, Warm White or Daylight
- Medium Bipin Base
- Common usages include: Vending Machines, Showcases, Bathroom Fixtures, and Freezers

Item	Watts	Nom Length	Bulb	Hours	Pkg
F/A18T8/24	18	24"	T8	7500	24
F/A18T8/26	18	26"	T8	7500	24
F/A18T8/28	18	28"	T8	7500	24
F/A18T8/30	18	30"	T8	7500	24
F/A25T12/28	25	28"	T12	7500	24
F/A25T12/30	25	30"	T12	7500	24
F/A25T12/33	25	33"	T12	7500	24



Sign High Output

- Outdoor Lighting for Billboards
- Cool White or Daylight
- Recessed Double-Contact (RDC) Base

Item	Watts	Nom Length	Lumens	Hours	Pkg
F108T12/HO	124	108"	8750	12,000	12
F117T12/HO	132	117"	9600	12,000	12
F120T12/HO	135	120"	9830	12,000	12



Grow and Aquarium

- Wide (WS) and Narrow Spectrums available
- Common applications include: Plant Grow and Aquarium

Item	Watts	Nom Length	Lumens	Hours	Pkg
F15T8GRO	15	18"	500	7500	24
F20T12GRO	20	24"	750	9000	24
F30T8GRO	30	36"	1300	7500	24
F30T12GRO	30	36"	1570	18,000	24
F032T8GRO	32	48"	1660	20,000	30
F40T12GRO	40	48"	1875	20,000	30
F96T12GRO	75	96"	3600	12,000	15
F96T12HO/GRO	110	96"	5200	12,000	15
F96T12VHO/GRO	215	96"	8500	10,000	15



BL

Blacklight (BL) and Blacklight Blue (BLB)

- Provides Special Lighting Effects for a Variety of Industries
- In addition BLB Filters out Visible Light Highlighting the Lighter Colors

Item	Watts	Nom Length	Hours	Pkg
F4T5	4	6"	6000	10
F6T5	6	9"	7500	10
F8T5	8	12"	7500	10
F15T8	15	18"	7500	24
F20T12	20	24"	9000	24
F032T8	32	48"	20,000	24
F40T12	40	48"	20,000	30



BLB



Colored

- Blue, Green, Gold, Pink or Red
- Common Usages include: Carnivals, Restaurants, Clubs and Special Lighting Effects

Item	Watts	Nom Length	Pkg
F15T8/COLOR	15	18"	24
F20T12/COLOR	20	24"	24
F032T8/COLOR	32	48"	24
F40T12/COLOR	40	48"	24
F72T12/COLOR	65	72"	15
F96T12/COLOR	75	96"	15
F96T12/HO/COLOR	215	96"	15



Full Spectrum

- Excellent Color Rendering across the Kelvin Spectrum
Produces a more Natural, Pleasing Light
- 95 CRI
- 5700K

Item	Watts	Nom Length	Lumens	Hours	Pkg
FS-F20T12	20	24"	810	9000	24
FS-F30T12	30	36"	1470	18,000	24
FS-F032T8	32	48"	1980	20,000	30
FS-F40T12	40	48"	2200	20,000	30
FS-F72T12	85	72"	3360	12,000	15
FS-F96T12	75	96"	4280	12,000	15
FS-F96T12/HO	215	96"	6770	12,000	15
FS-FB032T8	32	U-Shape	2050	18,000	12
FS-FB40T12/6	40	U-Shape	2050	18,000	12